



The new degree of comfort.™

Rheem Classic Plus® Series Two-Stage Air Conditioners



RA17 Series

Efficiencies up to 17 SEER/13 EER

Nominal Sizes 2, 3, 4 & 5 Ton

[7.03, 10.6, 14.06 & 17.6 kW]

Cooling Capacities 17.3 to 60.5 kBTU

[5.7 to 17.7 kW]



"Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet Energy Star. Ask your Contractor for details or visit www.energystar.gov."



- EcoNet™ Enabled product. The EcoNet Smart Home System provides advanced air & water control for maximum energy savings and ideal comfort.
- New composite base pan – dampens sound, captures louver panels, eliminates corrosion and reduces number of fasteners needed
- Powder coat paint system – for a long lasting professional finish
- The Two Stage Copeland Scroll™ UltraTech™ Compressor modulates between two capacity settings – 67% and 100% – providing more precise temperature control, lower humidity and greater efficiency in comparison to single stage compressors. It uses 70% fewer moving parts which also increases efficiency and reliability.
- Modern cabinet aesthetics – increased curb appeal with visually appealing design
- Curved louver panels – provide ultimate coil protection, enhance cabinet strength, and increased cabinet rigidity
- Optimized fan orifice – optimizes airflow and reduces unit sound
- Rust resistant screws – confirmed through 1500-hour salt spray testing
- PlusOne™ **Expanded Valve Space** – 3"-4"-5" service valve space – provides a minimum working area of 27-square inches for easier access
- PlusOne™ **Triple Service Access** – 15" wide, industry leading corner service access – makes repairs easier and faster. The two fastener removable corner allows optimal access to internal unit components. Individual louver panels come out once fastener is removed, for faster coil cleaning and easier cabinet reassembly
- Diagnostic service window with two-fastener opening – provides access to the high and low pressure.
- External gauge port access – allows easy connection of "low-loss" gauge ports
- Single-row condenser coil – makes unit lighter and allows thorough coil cleaning to maintain "out of the box" performance
- 35% fewer cabinet fasteners and fastener-free base – allow for faster access to internal components and hassle-free panel removal
- Service trays – hold fasteners or caps during service calls
- QR code – provides technical information on demand for faster service calls
- Fan motor harness with extra long wires allows unit top to be removed without disconnecting fan wire.
- High and low pressure standard on all models.



TABLE OF CONTENTS

Standard Feature	3
Available SKUs	3
Features & Benefits	4-6
Model Number Identification	7-8
General Data/Electrical Data	9
Accessories	10
Weighted Sound Power	10
Smart Home Systems	11-12
Unit Dimensions.....	13
Clearances.....	14
Wiring Diagrams	15-16
Application Guidelines	15-16
Refrigerant Line Size Information	17-18
Performance Data	19-26
Guide Specifications	27
Limited Warranty	28

Standard Feature Table

Feature	STANDARD FEATURES			
	24	36	48	60
R-410A Refrigerant	√	√	√	√
Maximum SEER	17	17	17	16
Maximum EER	13	13	13	12.5
EcoNet Enabled	√	√	√	√
Two Stage Copeland Scroll™ UltraTech™ Compressor	√	√	√	√
Field Installed Filter Drier	√	√	√	√
Front Seating Service Valves	√	√	√	√
Internal Pressure Relief Valve	√	√	√	√
Internal Thermal Overload	√	√	√	√
Long Line capability	√	√	√	√
Low Ambient capability with Kit	√	√	√	√
3-4-5 Expanded Valve Space	√	√	√	√
Composite Basepan	√	√	√	√
2 Screw Control Box Access	√	√	√	√
15" Access to Internal Components	√	√	√	√
Quick release louver panel design	√	√	√	√
No fasteners to remove along bottom	√	√	√	√
Optimized Venturi Airflow	√	√	√	√
Single row condenser coil	√	√	√	√
Powder coated paint	√	√	√	√
Rust resistant screws	√	√	√	√
QR code	√	√	√	√
External gauge ports	√	√	√	√
Service trays	√	√	√	√

√ = Standard


Available SKUs

Available Models	Description
RA1724AJ2CB	<i>Classic Plus</i> ® Series 2 ton 17 SEER Two Stage Air Conditioner-208/230/1/60
RA1736AJ2CB	<i>Classic Plus</i> ® Series 3 ton 17 SEER Two Stage Air Conditioner-208/230/1/60
RA1748AJ2CB	<i>Classic Plus</i> ® Series 4 ton 17 SEER Two Stage Air Conditioner-208/230/1/60
RA1760AJ2CB	<i>Classic Plus</i> ® Series 5 ton 17 SEER Two Stage Air Conditioner-208/230/1/60


Introduction to RA17 Air Conditioner

The RA17 is our EcoNet Enabled 17 SEER Two-Stage Air Conditioner and is part of the Rheem Air Conditioner product line that extends from 13 to 20 SEER. This highly featured and reliable air conditioner is designed for years of reliable, efficient operation when matched with Rheem indoor aluminum evaporator coils and furnaces or air handler units with aluminum evaporators.


The RA17 is exclusively designed to operate with the EcoNet Smart Home System. Developed by Rheem, The EcoNet Smart Home System allows homeowners to manage select high-efficiency, EcoNet Enabled air conditioners, heat pumps, gas furnaces, air handlers and water heaters from anywhere. EcoNet Enabled products in a home are connected through standard HVAC wiring; then, contractors have the option of adding an EcoNet WiFi kit (1) so the homeowner can access everything remotely through a free mobile app or mobile-friendly website. The Control Center (2) acts as both a thermostat for the heating and cooling system, and a remote control for connected water heaters.

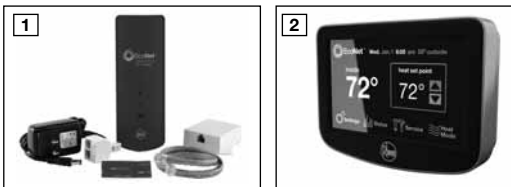

The EcoNet Smart Home System is the first integrated system for a home's Heating, Cooling and Water Heating equipment – allowing homeowners to manage the products that consume up to 65% of their home's energy. EcoNet sets Rheem, our distributor and contractor customers apart in the industry with a unique, advanced and efficient technology solution.

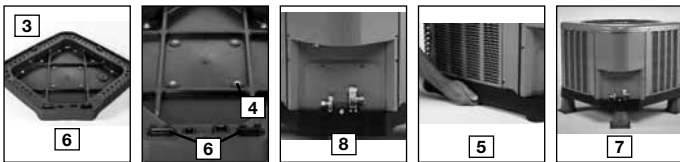


Our unique composite base (3) reduces sound emission, eliminates rattles, significantly reduces fasteners, eliminates corrosion and has integrated brass compressor attachment inserts (4). Furthermore it has incorporated into the design, water management features, means for hand placement (5) for unit maneuvering, screw trays (6) and inserts for lifting off unit pad. (7) Service Valves (8) are rigidly mounted in the composite base with 3" between suction and discharge valves, 4" clearance below service valves and a minimum of 5" above the service valves, creating industry leading ease of installation. The minimum

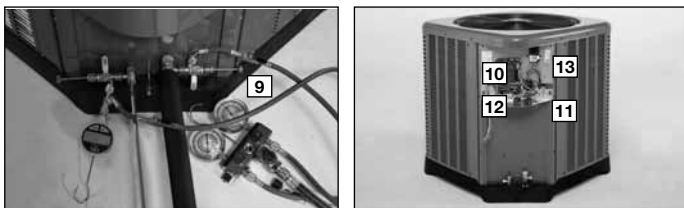


27 square-inches around the service valves allows ample room to remove service valve schrader prior to brazing, plenty of clearance for easy brazing of the suction and discharge lines to service valve outlets, easy access and hookup of low loss refrigerant gauges (9), and access to the service valve caps for opening. For applications with long-line lengths up to 250 feet total equivalent length, up to 200 feet condenser above evaporator, or up to 80 feet evaporator above condenser, the long-line instructions in the installation manual should be followed.


Controls are accessed from the corner of the unit by removing only two fasteners from the control access cover, revealing the industry's largest 15" wide and 14" tall control area (10). With all this room in the control area the high voltage electrical whip (11) can easily be inserted through the right size opening in the bottom of the control area. Routing it leads directly to contractor lugs for connection. The low voltage control wires (12) are easily connected to the units low voltage wiring. If contactor or capacitor (13) needs to be replaced there is more than adequate space to make the repair. The service window (14) can be removed by removing two screws, to access the high and low pressure switches and view interior of unit. (15) (High and low pressure is standard on RA17 models).

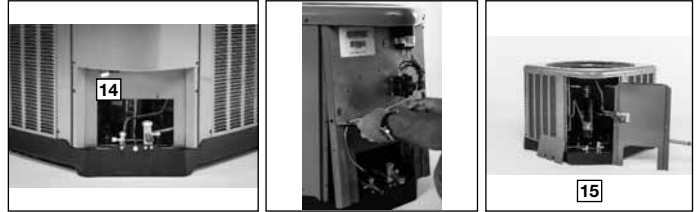

If in the rare event, greater access is needed to internal components, such as the compressor, the entire corner of the unit can be removed along with the top cover assembly to have unprecedented access to interior of the unit (16). Extra wire length is incorporated into each outdoor fan and compressor so top cover and control panel can be positioned next to the unit. With minimal effort the plug can be removed from the compressor and the outdoor fan wires can be removed from the capacitor to allow even more uncluttered access to the interior of the unit (17). Outdoor coil heights range from as short as 35" to 51". Disassembly to this degree and complete reassembly only takes a first time service technician less than 10 minutes. (17)

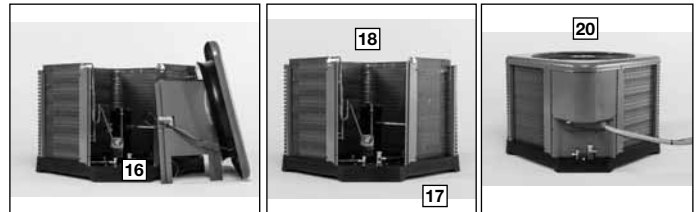

All units utilize strong formed louver panels which provide industry leading coil protection. Louver removal for coil cleaning is accomplished by removing one screw and lifting the panel out of the composite base pan. (19) All RA17 units utilize single row coils (18) making cleaning easy and complete, restoring the performance of the air conditioner back to out of the box performance levels year after year.

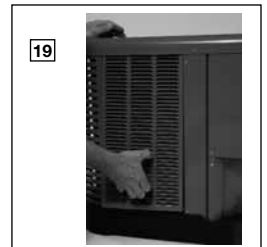


The outdoor fan motor has sleeve bearings and is inherently protected. The motor is totally enclosed for maximum protection from weather, dust and corrosion. (20) Access to the outdoor fan is made by removing four fasteners from the fan grille. The outdoor fan can be removed from the fan grille by removing 4 fasteners in the rare case outdoor fan motor fails.

Each cabinet has optimized composite (21) fan orifice assuring efficient and quiet airflow.



The entire cabinet has post powder paint (22) achieving 1000 hour salt spray rating, allowing the cabinet to retain its aesthetics throughout its life.

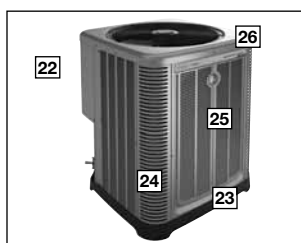

Two Stage Copeland Scroll™ UltraTech™ compressors with standard internal pressure relief and internal thermal overload are used on all capacities assuring longevity of high efficient and quiet operation for the life of the product.

All models come standard with high and low pressure controls. Each unit is shipped with filter drier for field installation and will trap any moisture or dirt that could contaminate the refrigerant system.



All cabinets have industry leading structural strength due to the composite base pan (23), interlocking corner post (24), formed curved louver panels (25) and drawn top cover (26) making it the most durable cabinet on the market today.

Each RA17 capacity has undergone rigorous psychometric testing to assure performance ratings of capacity, SEER and EER per AHRI Standard 210/240 rating conditions. Also each unit bears the UL mark and each unit is certified to UL 1995 safety standards.



Each unit has undergone specific strain and modal testing to assure tubing (27) is outside the units natural frequency and that the suction and discharge lines connected to the compressor withstand any starting, steady state operation, or shut down forces imposed by the compressor.

All units have been sound tested in sound chamber to AHRI 270 rating conditions, and A-weighted Sound Power Level tables produced, assuring units have acceptable noise qualities (see page 10). Each unit has been ran in cooling operation at 95°F and 82°F and sound ratings for the RA17 range from as low as 72.3 dBA to 76.7 dBA.

All units have been ship tested to assure units meet stringent "over the road" shipping conditions.

As manufactured, all units in the RA17 family have cooling capability to 55 °F. Addition of low ambient control will allow the unit to operate down to 0°F. Factory testing is performed on each unit. All component parts meet well defined specification and continually go through receiving inspections. Each component installed on a unit is scanned, assuring correct component utilization for a given unit capacity and voltage. All condenser coils are leak tested with pressurization test to 550#s and once installed and assembled, each units' complete refrigerant system is helium leak tested. All units are fully charged from the factory for up to 15 feet of piping. All units are factory run tested. The RA17 has a 10-year conditional unit replacement warranty (registration required) and a 10 year limited parts warranty.

Optional Accessories

(Refer to accessory chart for model #)

Compressor Crankcase Heater

Protects against refrigerant migration that can occur during low ambient operation

Compressor Sound Cover

- Reinforced vinyl compressor cover containing a 1½ inch thick batt of fiberglass insulation
- Open edges are sealed with a one-inch wide hook and loop fastening tape

Compressor Hard Start Kit

- Single-phase units are equipped with a PSC compressor motor, this type of motor normally does not need a potential relay and start capacitor
- Kit may be required to increase the compressor starting torque, in conditions such as low voltage

Low Ambient Kit

- Air conditioners operate satisfactorily in the cooling mode down to 55°F outdoor air temperature without any additional controls
- This Kit can be added in the field enabling unit to operate properly down to 0° in the cooling mode
- Crankcase heater and freezestat should be installed on compressors equipped with a low ambient kit

3"/6"/12"

- Gray high density polyethylene feet are available to raise unit off of mounting surface away from moisture

Decorative Top

- Can be installed on fan grille

Accessories

EcoNet Control Center



RETST601SYS

The EcoNet Control Center serves as the hub of communication for a home's Heating, Cooling and Water Heating systems, and is required to operate an EcoNet Enabled Heating & Cooling system in a fully communicating mode.

WiFi Kit for Heating and Cooling Systems



REWRA630SYS

The WiFi kit is required to remotely operate EcoNet Enabled Heating and Cooling Systems from the EcoNet Web portal and mobile apps.

Air Conditioners*

R	A	17	24	A	J	2	C	B	*
Brand	Product Category	SEER	Capacity BTU/HR	Major Series*	Voltage	Type	Controls	Minor Series**	Option Code
Rheem	A - Air Conditioners	13 - 13 SEER	18 - 18,000 [5.28 kW]	A - 1st Design	J - 1ph, 208-230/60	1 - Single-stage	C - Communicating	A - 1st Design	N/A
		14 - 14 SEER	24 - 24,000 [7.03 kW]	B - 2nd Design	C - 3ph, 208-230/60	2 - Two-stage	N - Non-Communicating	B - High and low pressure control	
		16 - 16 SEER	30 - 30,000 [8.79 kW]			V - Inverter			
		17 - 17 SEER	36 - 36,000 [10.55 kW]						
		20 - 20 SEER	42 - 42,000 [12.31 kW]						
			48 - 48,000 [14.07 kW]						
			60 - 60,000 [17.58 kW]						

*See page 3 for available SKU's.

Heat Pumps (For Reference)**

R	P	17	24	A	J	V	C	A	*
Brand	Product Category	SEER	Capacity BTU/HR	Major Series*	Voltage	Type	Controls	Minor Series**	Option Code
Rheem	P - Heat Pump	13 - 13 SEER	18 - 18,000 [5.28 kW]	A - 1st Design	J - 1ph, 208-230/60	1 - Single-stage	C - Communicating	A - 1st Design	N/A
		14 - 14 SEER	24 - 24,000 [7.03 kW]		C - 3ph, 208-230/60	2 - Two-stage	N - Non-Communicating		
		15 - 15 SEER	30 - 30,000 [8.79 kW]		D - 3ph, 460/60	V - Inverter			
		17 - 17 SEER	36 - 36,000 [10.55 kW]			P - Piston			
		20 - 20 SEER	42 - 42,000 [12.31 kW]						
			48 - 48,000 [14.07 kW]						
			60 - 60,000 [17.58 kW]						

Furnace Coils (For Reference)**

R	C	F	24	17	S	E	A	M	C	A	*
Brand	Product Category	Type	Capacity BTU/HR	Width	Efficiency	Metering Device	Major Series*	Orientation	Casing	Minor Series**	Option Code
Rheem	C - Evap Coil	F - Furn Coil	24 - 24,000 [7.03 kW]	14 - 14"	S - Standard Eff.	T-TXV	A - 1st Design	M - Multipoise	C - Cased	A - 1st Design	N/A
		H - Air-Handler Coil	36 - 36,000 [10.55 kW]	17 - 17.5"	M - Mid Eff.	E-EEV		V - Vertical only/convertible	U - Uncased		
			48 - 48,000 [14.07 kW]	21 - 21"	H - High Eff.	P-Piston		H - Ded.			
			60 - 60,000 [17.58 kW]	24 - 24.5"				Horizontal only			

**Model number ID's are for reference only. See available SKU page of applicable spec sheet for table of available SKU's for a specific model.

[] Designates Metric Conversions



Air

90%+ AFUE Gas Furnaces (For Reference)**

R	96	V	A	70	2	3	17	M	S	A
Brand	Series	Motor	Major Rev	Input BTU/HR	Stages	Air Flow	Cabinet Width	Configuration	Nox	Minor Rev
Rheem	90 - 90 AFUE	V - Variable speed	A - 1st Design	040 - 42,000 [12.31 kW]	1 - Single-stage	3 - up to 3 ton	14 - 14"	M - Multi	X - Low Nox	A - 1st Design
	92 - 92 AFUE	T - Constant Torque (X-13)		060 - 56,000 [16.41 kW]	2 - Two-stage	5 - 3 1/2 up to 5 ton	17 - 17.5"		S - Standard	
	95 - 95 AFUE			070 - 70,000 [20.51 kW]	M - Modulating		21 - 21"			
	96 - 96 AFUE			085 - 84,000 [24.62 kW]			24 - 24.5"			
	97 - 97 AFUE	P - PSC		100 - 98,000 [28.72 kW]						
				115 - 112,000 [32.82 kW]						

80% AFUE Gas Furnaces (For Reference)**

R	80	2	V	A	075	3	17	M	S	A
Brand	Series	Stages	Motor	Major Rev	Input BTU/HR	Air Flow	Cabinet Width	Configuration	Nox	Minor Rev
Rheem	80 - 80+ AFUE	1 - Single-stage	V - Variable speed	A - 1st Design	050 - 50,000 [15 kW]	3 - up to 3 ton	14 - 14"	M - Multi	X - Low Nox	A - 1st Design
		2 - Two-stage	T - Constant Torque (X-13)		075 - 75,000 [22 kW]	4 - 2 1/2 to 4 ton	17 - 17.5"	D - Down	S - Standard	
			P - PSC premium		100 - 100,000 [29 kW]	5 - 3 1/2 up to 5 ton	21 - 21"	Z - Down & zero clearance down flow		
			S - PSC standard		125 - 125,000 [37 kW]		24 - 24.5"			
					150 - 150,000 [44 kW]					

Air Handlers (For Reference)**

R	H	2	I	36	17	S	E	A	C	A	A	000	*	-
Brand	Product Category	Stages of Airflow	Motor Type	Capacity BTU/HR	Width	Coil Size	Metering Device	Major Series*	Controls	Voltage	Minor Series**	Factory Heat Cap	Option Code	
Rheem	H - Air Handler	1 - Single-Stage	V - Variable Speed	24 - 24,000 [7.03 kW]	14 - 14"	S - Standard Eff.	T - TEV	A - 1st Design	C - Communicating	A - 1ph, 115/60	A - 1st Design	00 - no factory heat with option code	*TBD	
		2 - Two-Stage	T - Constant Torque	36 - 36,000 [10.55 kW]	17 - 17.5"	M - Mid Eff.	E - EEV		N - Non-comm	J - 1ph, 208-240/60				
		M - Modulating	P - PSC	48 - 48,000 [14.07 kW]	21 - 21"	H - High Eff.	P - Piston		D - 3ph, 480/60	D - 3ph, 480/60				
				60 - 60,000 [17.58 kW]	24 - 24.5"									

**Model number ID's are for reference only. See available SKU page of applicable spec sheet for table of available SKU's for a specific model.

[J Designates Metric Conversions

Physical Data				
Model No.	RA1724A	RA1736A	RA1748A	RA1760A
Nominal Tonnage	2.0	3.0	4.0	5.0
Valve Connections				
Liquid Line O.D. – in.	3/8	3/8	3/8	3/8
Suction Line O.D. – in.	3/4	3/4	7/8	7/8
Refrigerant (R-410A) furnished oz. ¹	128	151	204	223
Compressor Type	Scroll			
Outdoor Coil				
Net face area – Outer Coil	19.8	22.2	32.3	32.3
Net face area – Inner Coil	—	—	—	—
Tube diameter – in.	0.375	0.375	0.375	0.375
Number of rows	1	1	1	1
Fins per inch	20	22	22	22
Outdoor Fan				
Diameter – in.	24	24	26	26
Number of blades	3	3	3	3
Motor hp	1/5	1/5	1/2	1/2
CFM	3326	3540	4251	5133
RPM	850	820	646	825
watts	112	112	132	113
Shipping weight – lbs.	200	209	297	298
Operating weight – lbs.	193	202	290	291
Electrical Data				
Line Voltage Data (Volts-Phase-Hz)	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Maximum overcurrent protection (amps)²	25	35	50	70
Minimum circuit ampacity³	16	21	32	42
Compressor				
Rated load amps	11.7	15.3	21.2	28.8
Locked rotor amps	58.3	83	104	152.9
Condenser Fan Motor				
Full load amps	1.4	1.2	5.3	5.3
Locked rotor amps	—	—	—	—

¹Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the installation instructions for information about set length and additional refrigerant charge required.

²HACR type circuit breaker or fuse.

³Refer to National Electrical Code manual to determine wire, fuse and disconnect size requirements.



Accessories

Model No.		RA1724	RA1736	RA1748	RA1760
EcoNet Control Center		RETST601SYS	RETST601SYS	RETST601SYS	RETST601SYS
WiFi Kit for Heating & Cooling		REWRA630SYS	REWRA630SYS	REWRA630SYS	REWRA630SYS
Compressor crankcase heater*		44-17402-49	44-17402-49	44-101884-05	44-101884-05
Low ambient control		RXAD-A08	RXAD-A08	RXAD-A08	RXAD-A08
Freeze Stat		50313	50313	50313	50313
Compressor sound cover		68-23427-26	68-23427-26	68-25217-10	68-25217-10
Compressor hard start kit		SK-A1	SK-A1	SK-A1	SK-A1
Heat pump Riser 6 in.		686020	686020	686020	686020
Liquid Line Solenoid (24 VAC, 50/60 Hz)	Solenoid Valve	200RD2T3TVLC	200RD2T3TVLC	200RD3T3TVLC	200RD3T3TVLC
	Solenoid Coil	61-AMG24V	61-AMG24V	61-AMG24V	61-AMG24V
Liquid Line Solenoid (120/240 VAC, 50/60 Hz)	Solenoid Valve	200RD2T3TVLC	200RD2T3TVLC	200RD3T3TVLC	200RD3T3TVLC
	Solenoid Coil	61-AMG120/240V	61-AMG120/240V	61-AMG120/240V	61-AMG120/240V

*Crankcase Heater recommended with Low Ambient Kit.

Weighted Sound Power Level (dBA)

Unit Size - Voltage, Series	Standard Rating (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA without tone adjustment)						
		125	250	500	1000	2000	4000	8000
RA1724A	72.5	48.6	53.7	62.9	63.0	60.5	57.3	54.6
RA1736A	72.3	53.1	52.7	60.9	62.4	61.2	58.4	51.6
RA1748A	73.0	46.1	50.4	59.5	64.6	59.6	55.8	54.6
RA1760A	76.7	58.8	60.5	65.6	65.2	62.9	62.4	55.5

NOTE: Tested in accordance with AHRI Standard 270-08 (not listed in AHRI)



Integrated Controls



EcoNet is smart, new technology developed exclusively by Rheem that allows Heating, Cooling, and Water Heating products to communicate with each other on one integrated network.

Easy to Setup, Easy to Use, Easy to Save

- Built with our 360°+1 design philosophy, it is optimized for Installability™, Performance, Integration & Serviceability
- Controls 65%† or more of a typical home’s energy use from a single device
- Can reduce energy costs by up to 30%††

Features

- Added support for new EEV (Electronic Expansion Valve) Air Handlers, Air Conditioners and Heat Pumps*
- Rapid installation with standard 4-wire configuration
- Automatically configures communicating equipment with optimal settings
- Adapts to home décor through interchangeable faceplates and adjustable background coloring
- Full-color, 4.7" LCD touchscreen display with easy-to-read icons and text
- Convenient date, time and indoor/outdoor temperature indications
- 5 operating modes with short-cycle protection (Heat, Cool, Auto, Emergency Heat, Fan Only)

- 7-Day programmable schedule with Smooth Arrival & Whole Home Vacation options
- Detailed operating status, alarm history, and audible alerts
- Supports humidifier accessories or over-cool based dehumidification
- One-touch access to Water Heater Management†††
- Easily manage from anywhere in the world with the compatible WiFi Module & EcoNet app for smart phones and tablets

Warranty

- 5-Year limited warranty from date of installation
- † Source – Department of Energy
- †† When compared to non-programmable thermostats. Source: ENERGY STAR® for Programmable Thermostats
- ††† Requires wired connection to EcoNet Enabled Electric or Hybrid Water Heaters



EcoNet™ Control Center
Home control with intuitive LCD touchscreen navigation

RETST601SYS

EcoNet Control Center Compatibility

OFFERINGS	HEATING & COOLING											WATER HEATING			
Product Categories	Gas Furnaces		Air Handlers		Air Conditioners				Heat Pumps			WiFi Kit for HVAC REWRA630SYS	Electric Tank Models Ending in EC2	Hybrid Tank HB50 Models	Gas Powered Damper Tank Models
Models	R96V	R802V	RHMV*	RH2T* (EEV**)	RA20*	RASL-JEC	RA17	RARL-JEC	RP20*	RP17*	RPRL-JEC				
RETST601SYS	✓	✓	✓	✓	✓	✓★	✓	✓★	✓	✓	✓★	✓	✓	✓	

*Available in 2015

**Electronic Expansion Valve (EEV) Models

★ Comfort Control² System™ Translator for EcoNet Required

Installation of the RETRN620CC2 Comfort Control² System™ Translator on the outdoor unit’s control board is required to operate Comfort Control² System™ Air Conditioner and Heat Pump models (****-JEC) with an EcoNet Control Center in a fully communicating mode when matched with EcoNet Enabled Furnaces or Air Handlers*.



The EcoNet™ WiFi Kit for Heating & Cooling Systems (REWRA630SYS) provides remote control of EcoNet Enabled air and water products from smart phones, tablets, and personal computers using the home's internet connection.

Features

- Enables remote operation from:
 - The EcoNet App on Apple® mobile devices (iPhone®, iPad®, & iPod® Touch) using iOS version 7.0 or later
 - The EcoNet App on Android™ based smart phones and tablets using Android™ version 4.4 or later
 - Recent versions of popular web browsers such as Internet Explorer, Chrome, Safari, etc.
- Designed for use with EcoNet communicating HVAC Systems
- Compatible with 802.11 b/g/n WiFi networks
- WPA-2 Security using AES/CCMP
- Status LEDs:
 - Power & Equipment Connection Status
 - Home Network WiFi Status
 - Internet Connection Status
- "WLAN SETUP" factory reset button


- 24" Port-to-Port Connection Cable
- 1" x 2" Double Adhesive Mounting Tape
- RJ12 Y Splitter (for use with communicating electric water heaters)

Compatibility

- Works with any HVAC System which includes an EcoNet Enabled furnace or air handler and an EcoNet control center.

Warranty

- 1 Year from installation date

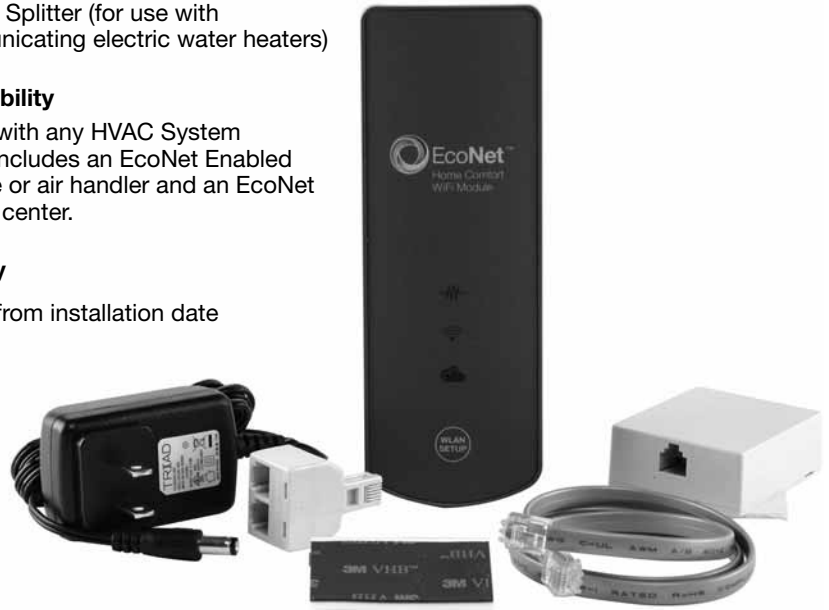


EcoNet WiFi Kit for Heating & Cooling Systems

REWRA630SYS

WiFi Kit Components


- EcoNet WiFi Module
- Installation Instructions
- V Power Adapter
- Junction Box

HVAC Connection Illustration

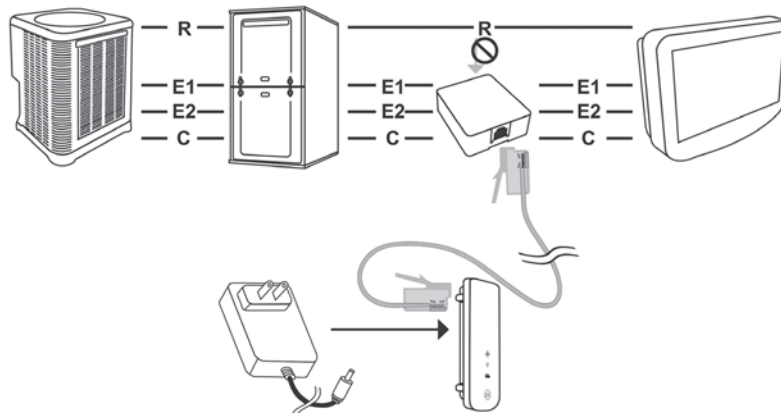

Unit Dimensions

MODEL NO.	OPERATING						SHIPPING					
	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
RA1724	35	889	33.75	857	33.75	857	36.75	933	36.38	924	36.38	924
RA1736	39	990	33.75	857	33.75	857	40.75	1035	36.38	924	36.38	924
RA1748	51	1295	35.75	908	35.75	908	52.75	1339	38.38	974	38.38	974
RA1760	51	1295	35.75	908	35.75	908	52.75	1339	38.38	974	38.38	974



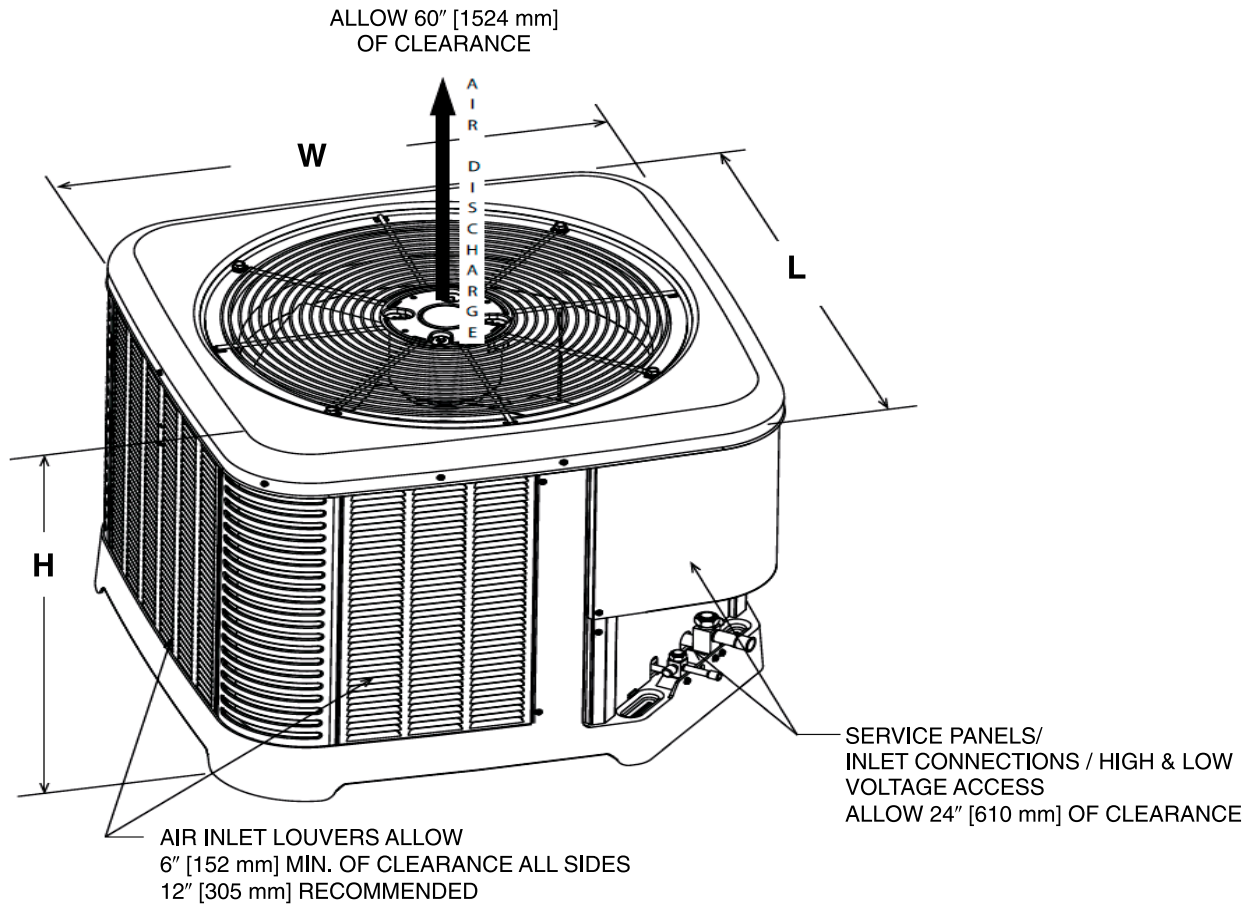


[] Designates Metric Conversions

ST-A1226-02-00



CLEARANCES

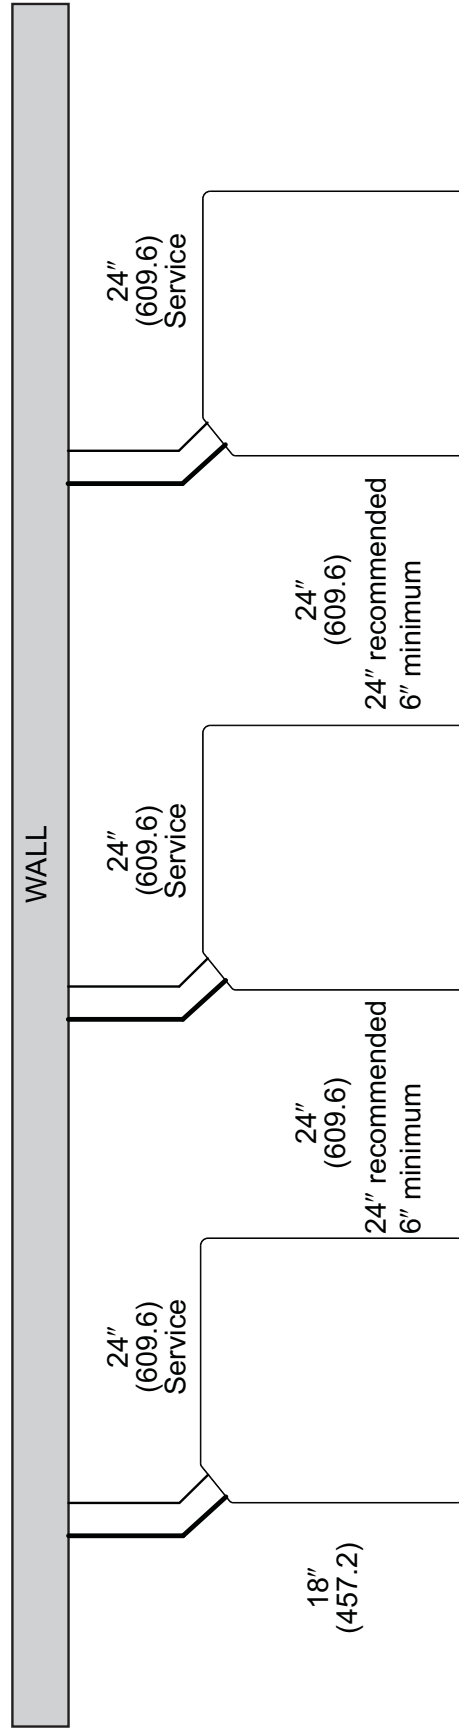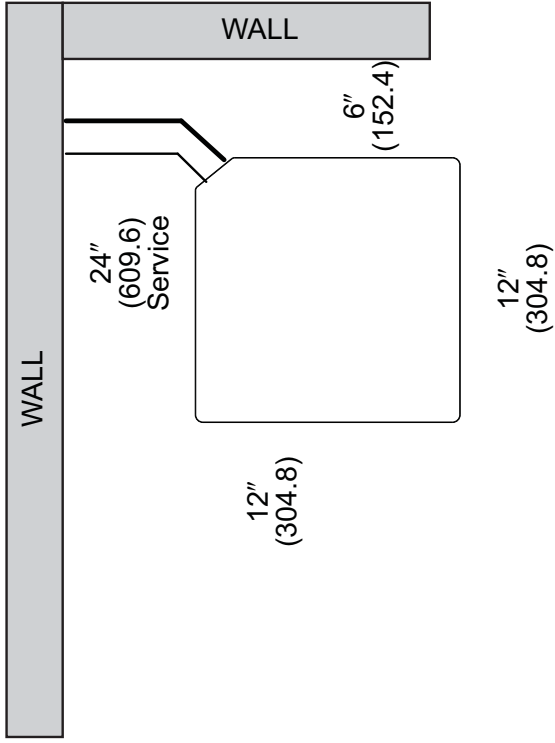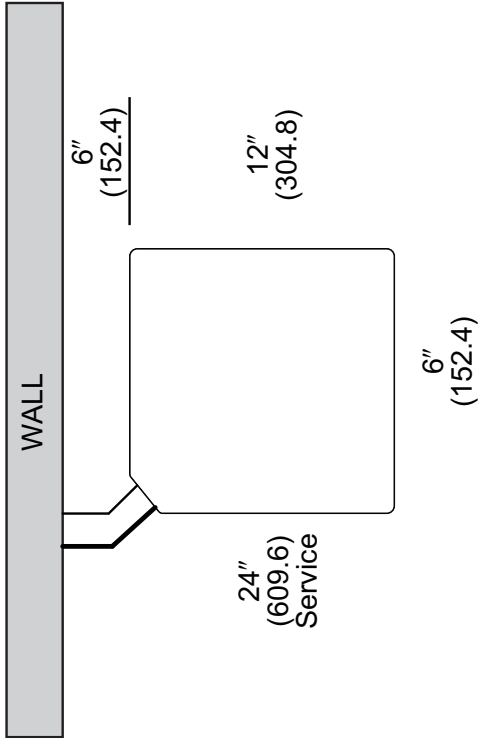


NOTE: NUMBERS IN () = mm

IMPORTANT: When installing multiple units in an alcove, roof well or partially enclosed area, ensure there is adequate ventilation to prevent re-circulation of discharge air.



Control Wiring

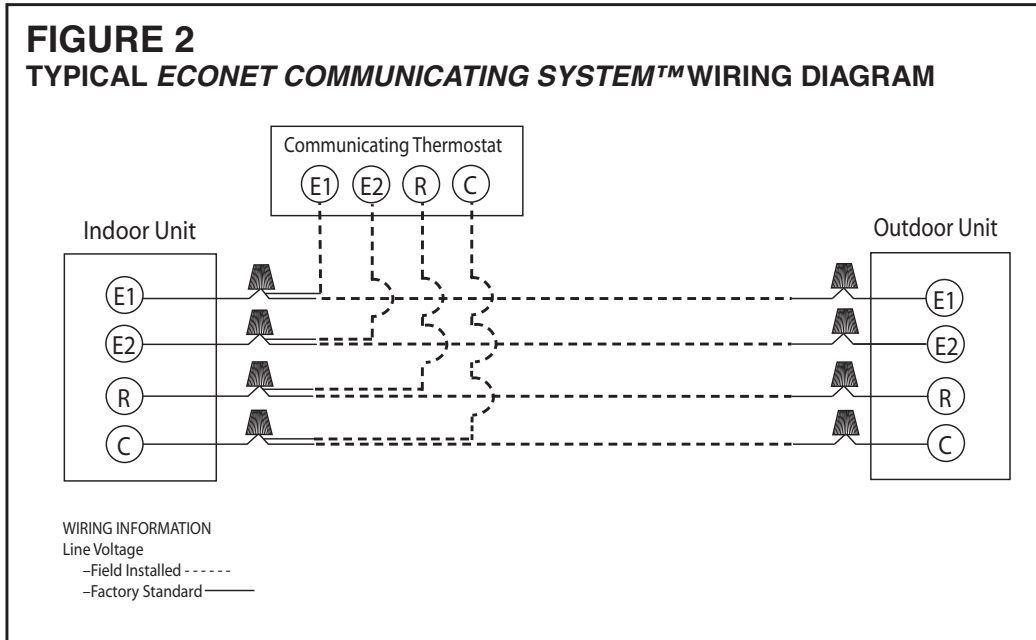





Application Guidelines

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01 -in. wc.
2. Minimum outdoor operation air temperature for cooling mode without low-ambient operation accessory is 55°F (12.8°C).
3. Maximum outdoor operating air temperature is 125°F (51.7°C).
4. For reliable operation, unit should be level in all horizontal planes.
5. Use only copper wire for electric connections at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
6. Do not apply capillary tube indoor coils to these units.
7. Factory – supplied filter drier must be installed.

Non-communicating Thermostat Wiring Diagrams

The following figures show the typical wiring diagrams with (-)HPN air handler and (-)ARL condensing unit. Cooling and heat pump airflows may need to be adjusted for homeowner comfort once the system is operational.

WIRE COLOR CODE			
BK – BLACK	G – GREEN	PR – PURPLE	Y – YELLOW
BR – BROWN	GY – GRAY	R – RED	
BL – BLUE	O – ORANGE	W – WHITE	

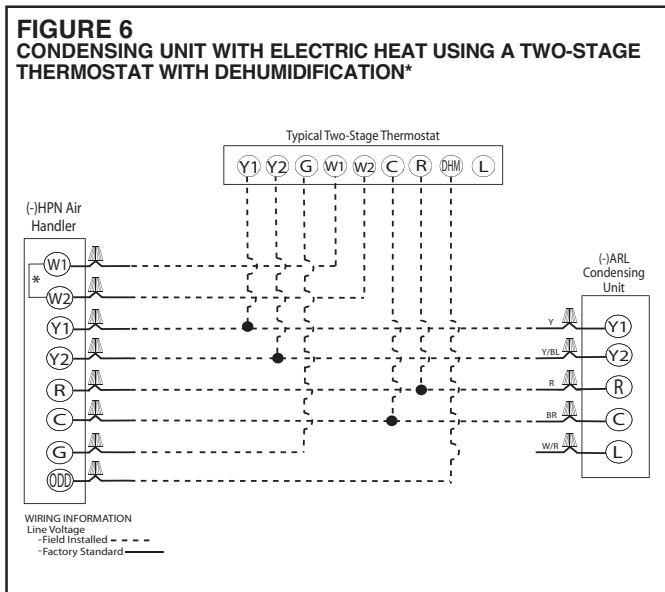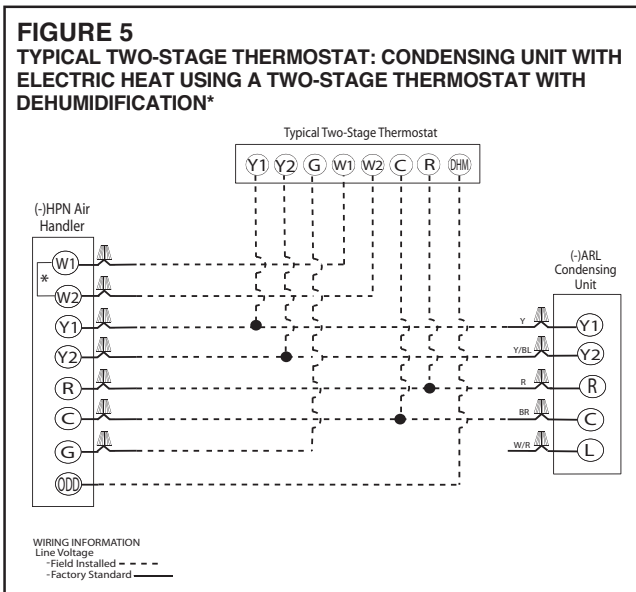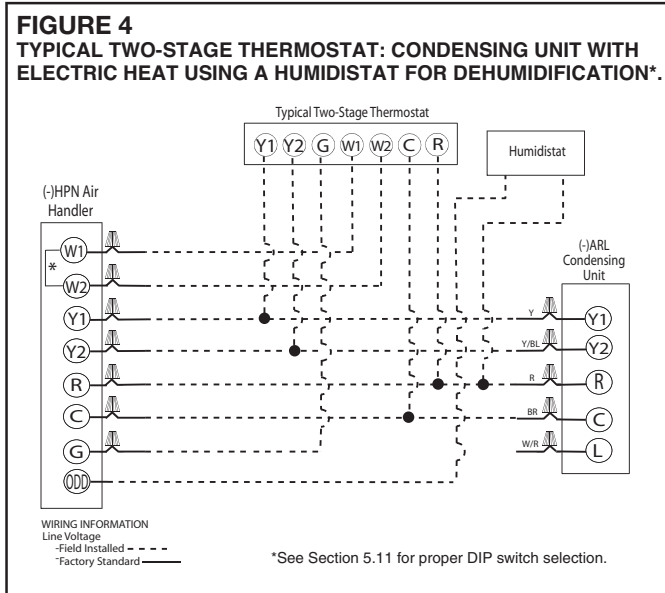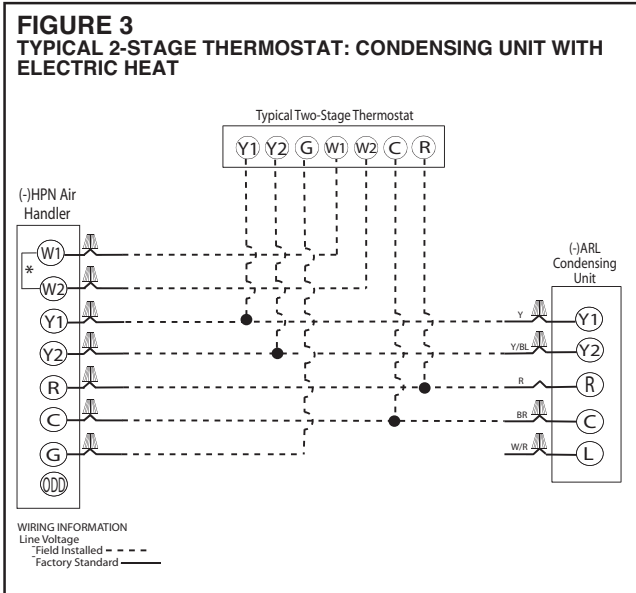

Conventional Thermostat Wiring

*If maximum outlet temperature rise is desired, it is recommended that W1 and W2 be jumpered together.

Application Guidelines

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01 -in. wc.
2. Minimum outdoor operation air temperature for cooling mode without low-ambient operation accessory is 55°F (12.8°C).
3. Maximum outdoor operating air temperature is 125°F (51.7°C).
4. For reliable operation, unit should be level in all horizontal planes.
5. Use only copper wire for electric connections at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
6. Do not apply capillary tube indoor coils to these units.
7. Factory – supplied filter drier must be installed.

Refrigerant Line Size Information

R-410A System Capacity Model	Liquid Line Size Connection Size (Inch I.D.) (mm)	Liquid Line Size (Inch O.D.) (mm)	Liquid Line Selection Chart																
			Elevation (Above or Below) Indoor Coil Total Equivalent Length - Feet [m]																
			25 [7.62]	50 [15.24]	75 [22.86]	100 [30.48]	125 [45.72]	150 [45.72]	175 [53.34]	200 [60.96]	225 [68.58]	250 [76.20]	275 [83.82]	300 [91.44]					
24	3/8" [9.53]	1/4 [6.35]	45 [13.72]	20 [6.1]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		5/16 [7.94]	25 [7.62]	50 [15.24]	75 [22.86]	70 [21.34]	65 [19.81]	55 [16.76]	50 [15.24]	45 [13.72]	40 [12.19]	30 [9.14]	25 [7.62]	20 [6.1]	N/R	N/R	N/R	N/R	
		3/8 [9.53]	25 [7.62]	50 [15.24]	75 [22.86]	85 [25.91]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]
		7/16 [11.12]	25 [7.62]	50 [15.24]	75 [22.86]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]
		1/2 [12.71]	25 [7.62]	50 [15.24]	75 [22.86]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]	95 [28.96]
		1/4 [6.35]	25 [7.62]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
36	3/8" [9.53]	5/16 [7.94]	25 [7.62]	50 [15.24]	45 [13.72]	35 [10.67]	20 [6.1]	5 [1.52]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		3/8 [9.53]	25 [7.62]	50 [15.24]	70 [21.34]	65 [19.81]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	
		7/16 [11.12]	25 [7.62]	50 [15.24]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	75 [22.86]	
		1/2 [12.71]	25 [7.62]	50 [15.24]	75 [22.86]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	
		1/4 [6.35]	25 [7.62]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
		5/16 [7.94]	25 [7.62]	50 [15.24]	75 [22.86]	70 [21.34]	65 [19.81]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]	60 [18.29]
48	3/8" [9.53]	3/8 [9.53]	25 [7.62]	50 [15.24]	70 [21.34]	60 [18.29]	55 [16.76]	40 [12.19]	30 [9.14]	25 [7.62]	15 [4.57]	10 [3.05]	N/R	N/R	N/R	N/R	N/R		
		7/16 [11.12]	25 [7.62]	50 [15.24]	75 [22.86]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]		
		1/2 [12.71]	25 [7.62]	50 [15.24]	75 [22.86]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]		
		1/4 [6.35]	25 [7.62]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		5/16 [7.94]	25 [7.62]	50 [15.24]	75 [22.86]	70 [21.34]	60 [18.29]	55 [16.76]	45 [13.72]	40 [12.19]	30 [9.14]	25 [7.62]	15 [4.57]	10 [3.05]	N/R	N/R	N/R	N/R	
		3/8 [9.53]	25 [7.62]	50 [15.24]	75 [22.86]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	80 [24.38]	
60	3/8" [9.53]	7/16 [11.12]	25 [7.62]	50 [15.24]	75 [22.86]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]	85 [25.91]		
		1/2 [12.71]	25 [7.62]	50 [15.24]	75 [22.86]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]	90 [27.43]		
		1/4 [6.35]	25 [7.62]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		5/16 [7.94]	25 [7.62]	30 [9.14]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		3/8 [9.53]	25 [7.62]	50 [15.24]	55 [16.76]	45 [13.72]	35 [10.67]	25 [7.62]	15 [4.57]	5 [1.52]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		7/16 [11.12]	25 [7.62]	50 [15.24]	75 [22.86]	70 [21.34]	65 [19.81]	60 [18.29]	55 [16.76]	50 [15.24]	45 [13.72]	40 [12.19]	35 [10.67]	30 [9.14]	25 [7.62]	20 [6.1]	15 [4.57]	10 [3.05]	

NOTES:

N/R = Application not recommended.

Grey = This application is acceptable, but the long line guidelines must be followed. Reference Long Line Set section in the I&O

[] Designates Metric Conversions



Refrigerant Line Size Information (con't.)

R-410A System Capacity Model	Vapor Line Connection Size (Inch I.D.) [mm]	Vapor Line Size (Inch O.D.) [mm]	Vapor Line Selection Chart Capacity Multiplier Table																	
			Total Equivalent Length - Feet [m]																	
			25 [7.62]	50 [15.24]	75 [22.86]	100 [30.48]	125 [45.72]	150 [45.72]	175 [53.34]	200 [60.96]	225 [68.58]	250 [76.20]	275 [83.82]	300 [91.44]						
24	3/4" [19.06]	5/8 [15.88]	0.99	1.00	0.97	0.98	0.98	0.98	0.96	0.96	0.95	0.94	0.95	0.94	0.95	0.94	0.94	0.93		
		3/4 [19.05]	1.00	1.00	0.99	0.99	0.98	1.00	0.99	1.00	0.99	0.99	0.99	0.99	0.97	0.98	0.98	0.98		
		7/8 [22.23]	1.01	1.01	1.00	1.00	1.00	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99		
		1 [25.4]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
36	3/4" [19.06]	1-1/8 [28.58]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R		
		5/8 [15.88]	0.99	0.98	0.97	0.95	0.95	0.95	0.93	0.91	0.91	0.91	0.90	0.88	0.87	0.87	0.87	0.86		
		3/4 [19.05]	1.00	0.99	0.99	0.99	0.98	0.98	0.98	0.97	0.97	0.97	0.96	0.96	0.96	0.96	0.95	0.95	0.95	
		7/8 [22.23]	1.01	1.00	1.00	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99	
48	3/4" [19.06]	1 [25.4]	1.01	1.01	1.01	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00		
		1-1/8 [28.58]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		5/8 [15.88]	0.97	0.96	0.93	0.91	0.89	0.89	0.88	0.87	0.85	0.85	0.83	0.82	0.82	0.82	0.82	N/R	N/R	
		3/4 [19.05]	0.99	0.98	0.98	0.96	0.96	0.96	0.95	0.94	0.94	0.94	0.93	0.92	0.92	0.92	0.92	N/R	N/R	
60	3/4" [19.06]	7/8 [22.23]	1.00	1.00	0.99	0.99	0.98	0.98	0.98	0.98	0.97	0.97	0.96	0.96	0.96	0.96	0.96	N/R	N/R	
		1 [25.4]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	
		1-1/8 [28.58]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
		5/8 [15.88]	0.96	0.93	0.91	0.88	0.86	0.86	0.84	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	N/R	N/R	
	3/4" [19.06]	3/4 [19.05]	0.99	0.97	0.96	0.95	0.94	0.94	0.93	0.92	0.91	0.91	0.91	0.91	0.91	0.91	0.91	N/R	N/R	
		7/8 [22.23]	1.00	0.99	0.98	0.98	0.97	0.97	0.97	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	N/R	N/R	
		1 [25.4]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
		1-1/8 [28.58]	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R

NOTES:

N/R = Application not recommended.

All calculations assume a 3/8" liquid line

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling

High Sales Volume Tested Combination (HSVTC)								
Outdoor Unit	Indoor Coil or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	RH2T2421MEAC	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8231639
RA1736AJ2	RH2T3621MEAC	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8231642
RA1748AJ2	RH2T4821MEAC	47000 [13.8]	34000 [10.0]	13000 [3.8]	17.00	13.00	1400 [660.7]	8231644
RA1760AJ2	RH2T6024MEAC	56000 [16.4]	39300 [11.5]	16700 [4.9]	16.00	12.50	1550 [731.5]	8231646

Coil Only Ratings								
Outdoor Unit	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	RCF2417SEAM+RXMD-C04	24000 [7.0]	17100 [5.0]	6900 [2.0]	14.50	13.00	800 [377.6]	8550848
	RCF2421MEAM+RXMD-C04	24000 [7.0]	17100 [5.0]	6900 [2.0]	15.10	12.50	800 [377.6]	8234324
RA1736AJ2	RCF3621MEAM+RXMD-C04	36000 [10.6]	26000 [7.6]	10000 [2.9]	15.10	12.50	1200 [566.3]	8231640
	RCF6021SEAM+RXMD-C04	36000 [10.6]	26000 [7.6]	10000 [2.9]	15.50	12.50	1200 [566.3]	8231641
RA1748AJ2	RCF6021SEAM+RXMD-C04	48000 [14.1]	34600 [10.1]	13400 [3.9]	15.50	12.50	1550 [731.5]	8231643
RA1760AJ2	RCF6024MEAM+RXMD-C04	55500 [16.3]	38100 [11.2]	17400 [5.1]	14.50	11.70	1600 [755.1]	8231645

R802V: Prestige 2-Stage 80% ECM Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	R802VA050317M	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9123072
		RCF2421MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9123081
		RCF3621MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9123090
RA1724AJ2	R802VA050317MSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550835
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8234319
RA1724AJ2	R802VA050317MXA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550836
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8330813
RA1724AJ2	R802VA075317M	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	675 [318.6]	9123073
		RCF2421MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	675 [318.6]	9123082
		RCF3621MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	675 [318.6]	9123091
RA1724AJ2	R802VA075317MSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	675 [318.6]	8550837
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	675 [318.6]	8234320
RA1724AJ2	R802VA075317MXA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	675 [318.6]	8550838
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	675 [318.6]	8330814
RA1724AJ2	R802VA075317Z	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9123074
RA1724AJ2	R802VA075317ZSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550839
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8234321
RA1724AJ2	R802VA075317ZSB	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550840
RA1724AJ2	R802VA075317ZXA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550841
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8330815
RA1724AJ2	R802VA075317ZXB	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	725 [342.2]	8550842
RA1724AJ2	R802VA075421M	RCF2421MEA	24000 [7.0]	12100 [3.5]	6900 [2.0]	16.50	13.00	825 [389.4]	9123083
		RCF3621MEA	24000 [7.0]	12200 [3.6]	6900 [2.0]	17.00	13.00	825 [389.4]	9123092

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R802V: Prestige 2-Stage 80% ECM Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	R802VA075421Z	RCF2417SEA	24000 [7.0]	14700 [4.3]	6900 [2.0]	17.00	13.00	875 [413.0]	9123075
		RCF2421MEA	24000 [7.0]	14700 [4.3]	6900 [2.0]	17.00	13.00	875 [413.0]	9123084
		RCF3621MEA	24000 [7.0]	14800 [4.3]	6900 [2.0]	17.00	13.00	875 [413.0]	9123093
RA1724AJ2	R802VA100521M	RCF2417SEA	24000 [7.0]	12200 [3.6]	6900 [2.0]	16.50	13.00	825 [389.4]	9123076
		RCF2421MEA	24000 [7.0]	12100 [3.5]	6900 [2.0]	16.50	13.00	825 [389.4]	9123085
		RCF3621MEA	24000 [7.0]	12200 [3.6]	6900 [2.0]	17.00	13.00	825 [389.4]	9123094
RA1736AJ2	R802VA050317M	RCF3617SEA	34200 [10.0]	17600 [5.2]	11000 [3.2]	16.00	12.20	975 [460.1]	9123099
		RCF3621MEA	36000 [10.6]	19200 [5.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	9123110
		RCF6021SEA	36000 [10.6]	19700 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123124
RA1736AJ2	R802VA050317MSA	RCF3617SEAM	34600 [10.1]	23800 [7.0]	10800 [3.2]	16.00	12.20	1050 [495.5]	8550852
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8296010
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8296013
RA1736AJ21	R802VA050317MXA	RCF3617SEAM	34600 [10.1]	23800 [7.0]	10800 [3.2]	16.00	12.20	1050 [495.5]	8550853
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8309173
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8309176
RA1736AJ2	R802VA075317M	RCF3617SEA	34800 [10.2]	18300 [5.4]	10600 [3.1]	16.00	12.50	1075 [507.3]	9123100
		RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123111
		RCF6021SEA	36000 [10.6]	20100 [5.9]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123125
RA1736AJ2	R802VA075317MSA	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550854
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8232069
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8232078
RA1736AJ2	R802VA075317MXA	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550855
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330819
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330830
RA1736AJ2	R802VA075317Z	RCF3617SEA	34800 [10.2]	18300 [5.4]	10800 [3.2]	16.00	12.50	1050 [495.5]	9123101
RA1736AJ2	R802VA075317ZSA	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232070
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232079
RA1736AJ2	R802VA075317ZXA	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330820
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330831
RA1736AJ2	R802VA075421M	RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123112
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123126
		RCF6024MEA	36000 [10.6]	20200 [5.9]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123137
RA1736AJ2	R802VA075421MSA1	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8296011
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8296014
RA1736AJ2	R802VA075421MXA	RCF3621HTAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330818
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8309175
		RCF3621MTAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330828
		RCF3624MTAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330829
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8309177
RA1736AJ2	R802VA075421Z	RCF3617SEA	34800 [10.2]	18300 [5.4]	10600 [3.1]	16.00	12.50	1075 [507.3]	9123102
		RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123113
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123127
RA1736AJ2	R802VA075421ZSA	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550856
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8232071
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8232080
RA1736AJ2	R802VA075421ZSB	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550857
RA1736AJ2	R802VA075421ZXA	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550858
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330821
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330832

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R802V: Prestige 2-Stage 80% ECM Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1736AJ2	R802VA075421ZXB	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550859
RA1736AJ2	R802VA100521M	RCF3617SEA	35800 [10.5]	19000 [5.6]	9900 [2.9]	16.00	12.50	1250 [589.9]	9123103
		RCF3621MEA	36000 [10.6]	19100 [5.6]	10000 [2.9]	17.00	13.00	1025 [483.7]	9123114
		RCF6021SEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	17.00	13.00	1025 [483.7]	9123128
		RCF6024MEA	36000 [10.6]	19700 [5.8]	10000 [2.9]	17.00	13.00	1025 [483.7]	9123138
RA1736AJ2	R802VA100521MSA	RCF3617SEAM	35800 [10.5]	25900 [7.6]	9900 [2.9]	16.00	12.50	1250 [589.9]	8550860
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1025 [483.7]	8232072
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1025 [483.7]	8232081
RA1736AJ2	R802VA100521MXA	RCF3617SEAM	35800 [10.5]	25900 [7.6]	9900 [2.9]	16.00	12.50	1250 [589.9]	8550861
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1025 [483.7]	8330822
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1025 [483.7]	8330833
RA1736AJ2	R802VA100521Z	RCF3617SEA	34800 [10.2]	18800 [5.5]	10800 [3.2]	16.00	12.50	1050 [495.5]	9123104
		RCF3621MEA	36000 [10.6]	20100 [5.9]	10000 [2.9]	16.50	13.00	1050 [495.5]	9123115
		RCF6021SEA	36000 [10.6]	20700 [6.1]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123129
RA1736AJ2	R802VA100521ZSA	RCF3617SEAM	35400 [10.4]	25300 [7.4]	10100 [3.0]	16.00	12.50	1200 [566.3]	8550862
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8232073
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232082
RA1736AJ2	R802VA100521ZSB	RCF3617SEAM	35400 [10.4]	25300 [7.4]	10100 [3.0]	16.00	12.50	1200 [566.3]	8550863
RA1736AJ2	R802VA100521ZXA	RCF3617SEAM	35400 [10.4]	25300 [7.4]	10100 [3.0]	16.00	12.50	1200 [566.3]	8550864
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8330823
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330834
RA1736AJ2	R802VA100521ZXB	RCF3617SEAM	35400 [10.4]	25300 [7.4]	10100 [3.0]	16.00	12.50	1200 [566.3]	8550865
RA1736AJ2	R802VA125524M	RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123116
		RCF6021SEA	36000 [10.6]	20100 [5.9]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123130
		RCF6024MEA	36000 [10.6]	20200 [5.9]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123139
RA1736AJ2	R802VA125524Z	RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123117
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123131
		RCF6024MEA	36000 [10.6]	20200 [5.9]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123140
RA1748AJ2	R802VA075421M	RCF6021SEA	47000 [13.8]	25500 [7.5]	13000 [3.8]	17.00	13.00	1425 [672.5]	9123142
		RCF6024MEA	48000 [14.1]	25300 [7.4]	14500 [4.2]	17.00	13.00	1425 [672.5]	8797256
RA1748AJ2	R802VA075421MSA	RCF6021SEAM	47000 [13.8]	34000 [10.0]	13000 [3.8]	17.00	13.00	1425 [672.5]	8296017
RA1748AJ2	R802VA075421MXA	RCF6021SEAM	47000 [13.8]	34000 [10.0]	13000 [3.8]	17.00	13.00	1425 [672.5]	8309179
RA1748AJ2	R802VA075421Z	RCF6021SEA	47500 [13.9]	26400 [7.7]	12100 [3.5]	17.00	12.50	1550 [731.5]	9123143
RA1748AJ2	R802VA075421ZSA	RCF6021SEAM	47500 [13.9]	35400 [10.4]	12100 [3.5]	17.00	12.50	1550 [731.5]	8232087
RA1748AJ2	R802VA075421ZXA	RCF6021SEAM	47500 [13.9]	35400 [10.4]	12100 [3.5]	17.00	12.50	1550 [731.5]	8330839
RA1748AJ2	R802VA100521M	RCF6021SEA	48000 [14.1]	26600 [7.8]	12200 [3.6]	17.00	13.00	1525 [719.7]	9123144
		RCF6024MEA	48000 [14.1]	25300 [7.4]	13300 [3.9]	17.00	13.00	1400 [660.7]	9123150
RA1748AJ2	R802VA100521MSA	RCF6021SEAM	48000 [14.1]	35800 [10.5]	12200 [3.6]	17.00	13.00	1525 [719.7]	8232088
RA1748AJ2	R802VA100521MXA	RCF6021SEAM	48000 [14.1]	35800 [10.5]	12200 [3.6]	17.00	13.00	1525 [719.7]	8330840
RA1748AJ2	R802VA100521Z	RCF6021SEA	47000 [13.8]	25600 [7.5]	13100 [3.8]	17.00	13.00	1400 [660.7]	9104548
RA1748AJ2	R802VA100521ZSA	RCF6021SEAM	47000 [13.8]	33900 [9.9]	13100 [3.8]	17.00	13.00	1400 [660.7]	8232089
RA1748AJ2	R802VA100521ZXA	RCF6021SEAM	47000 [13.8]	33900 [9.9]	13100 [3.8]	17.00	13.00	1400 [660.7]	8330841
RA1748AJ2	R802VA125524M	RCF6021SEA	48000 [14.1]	26600 [7.8]	12200 [3.6]	17.00	13.00	1525 [719.7]	9123145
		RCF6024MEA	48000 [14.1]	25300 [7.4]	13300 [3.9]	17.00	13.00	1400 [660.7]	8797257
RA1748AJ2	R802VA125524Z	RCF6021SEA	47500 [13.9]	25600 [7.5]	12700 [3.7]	17.00	13.00	1450 [684.3]	9123146
		RCF6024MEA	48000 [14.1]	25500 [7.5]	14500 [4.2]	17.00	13.00	1400 [660.7]	8797258
RA1760AJ2	R802VA075421M	RCF6021SEA	54000 [15.8]	28300 [8.3]	17100 [5.0]	15.50	12.00	1550 [731.5]	9123151
		RCF6024MEA	55000 [16.1]	28400 [8.3]	17700 [5.2]	16.00	12.50	1425 [672.5]	9123159

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R802V: Prestige 2-Stage 80% ECM Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1760AJ2	R802VA075421MSA	RCF6024MEAM	55000 [16.1]	37300 [10.9]	17700 [5.2]	16.00	12.50	1425 [672.5]	8232096
RA1760AJ2	R802VA075421MXA	RCF6024MEAM	55000 [16.1]	37300 [10.9]	17700 [5.2]	16.00	12.50	1425 [672.5]	8330848
RA1760AJ2	R802VA075421Z	RCF6021SEA	54000 [15.8]	28600 [8.4]	16800 [4.9]	15.50	11.70	1600 [755.1]	9123152
RA1760AJ2	R802VA075421ZSA	RCF6021SEAM	54000 [15.8]	37200 [10.9]	16800 [4.9]	15.50	11.70	1600 [755.1]	8232092
RA1760AJ2	R802VA075421ZXA	RCF6021SEAM	54000 [15.8]	37200 [10.9]	16800 [4.9]	15.50	11.70	1600 [755.1]	8330844
RA1760AJ2	R802VA100521M	RCF6021SEA	55000 [16.1]	30300 [8.9]	15800 [4.6]	16.00	12.00	1725 [814.1]	9123153
		RCF6024MEA	55500 [16.3]	30300 [8.9]	16700 [4.9]	16.00	12.50	1575 [743.3]	9123160
RA1760AJ2	R802VA100521MSA	RCF6021SEAM	55000 [16.1]	39200 [11.5]	15800 [4.6]	16.00	12.00	1725 [814.1]	8232093
		RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.50	1575 [743.3]	8232097
RA1760AJ2	R802VA100521MXA	RCF6021SEAM	55000 [16.1]	39200 [11.5]	15800 [4.6]	16.00	12.00	1725 [814.1]	8330845
		RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.50	1575 [743.3]	8330849
RA1760AJ2	R802VA100521Z	RCF6021SEA	54000 [15.8]	28400 [8.3]	17100 [5.0]	15.50	12.00	1550 [731.5]	9123154
RA1760AJ2	R802VA100521ZSA	RCF6021SEAM	54000 [15.8]	36900 [10.8]	17100 [5.0]	15.50	12.00	1550 [731.5]	8232094
		RCF6024MEAM	55500 [16.3]	38700 [11.3]	16800 [4.9]	16.00	12.00	1550 [731.5]	8232098
RA1760AJ2	R802VA100521ZXA	RCF6021SEAM	54000 [15.8]	36900 [10.8]	17100 [5.0]	15.50	12.00	1550 [731.5]	8330846
		RCF6024MEAM	55500 [16.3]	38700 [11.3]	16800 [4.9]	16.00	12.00	1550 [731.5]	8330850
RA1760AJ2	R802VA125524M	RCF6021SEA	55000 [16.1]	30300 [8.9]	15800 [4.6]	16.00	12.00	1725 [814.1]	9123155
		RCF6024MEA	55500 [16.3]	30700 [9.0]	16700 [4.9]	16.00	12.50	1575 [743.3]	9123161
RA1760AJ2	R802VA125524MSA	RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.50	1575 [743.3]	8232099
RA1760AJ2	R802VA125524MXA	RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.50	1575 [743.3]	8330851
RA1760AJ2	R802VA125524Z	RCF6021SEA	54000 [15.8]	28400 [8.3]	17400 [5.1]	15.50	12.00	1525 [719.7]	9123156
		RCF6024MEA	55500 [16.3]	30300 [8.9]	16700 [4.9]	16.00	12.00	1575 [743.3]	9123162
RA1760AJ2	R802VA125524ZSA	RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.00	1575 [743.3]	8232100
RA1760AJ2	R802VA125524ZXA	RCF6024MEAM	55500 [16.3]	38800 [11.4]	16700 [4.9]	16.00	12.00	1575 [743.3]	8330852

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R96V: 96% AFUE 2-stage Variable Speed Multiphase Gas Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	R96VA0402317M	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	675 [318.6]	9123077
		RCF2421MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	675 [318.6]	9123086
		RCF3621MEA	24000 [7.0]	13900 [4.1]	6900 [2.0]	17.00	13.00	675 [318.6]	9123095
RA1724AJ2	R96VA0402317MSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	675 [318.6]	8550845
RA1724AJ2	R96VA0602317M	RCF2417SEA	24000 [7.0]	13700 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	9123078
		RCF2421MEA	24000 [7.0]	14100 [4.1]	6900 [2.0]	17.00	13.00	775 [365.8]	9123087
		RCF3621MEA	24000 [7.0]	13700 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	9123096
RA1724AJ2	R96VA0602317MSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8550846
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	775 [365.8]	8234322
RA1724AJ2	R96VA0702317M	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	9123079
		RCF2421MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	9123088
		RCF3621MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	9123097
RA1724AJ2	R96VA0702317MSA	RCF2417SEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8550847
		RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8234323
RA1724AJ2	R96VA0852521M	RCF2417SEA	24000 [7.0]	12500 [3.7]	6900 [2.0]	16.50	13.00	825 [389.4]	9123080
		RCF2421MEA	24000 [7.0]	12500 [3.7]	6900 [2.0]	16.50	13.00	825 [389.4]	9123089
		RCF3621MEA	24000 [7.0]	12500 [3.7]	6900 [2.0]	17.00	13.00	825 [389.4]	9123098
RA1724AJ2	R96VA0602317MXA	RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	775 [365.8]	8330816
RA1724AJ2	R96VA0702317MXA	RCF2421MEAM	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8330817
RA1736AJ2	R96VA0402317M	RCF3617SEA	34200 [10.0]	17200 [5.0]	11100 [3.3]	16.00	12.50	950 [448.4]	9123105
		RCF3621MEA	36000 [10.6]	19100 [5.6]	10000 [2.9]	16.50	13.00	1025 [483.7]	9123118
RA1736AJ2	R96VA0402317MSA	RCF3617SEAM	34200 [10.0]	23100 [6.8]	11100 [3.3]	16.00	12.50	950 [448.4]	8550870
RA1736AJ2	R96VA0602317M	RCF3617SEA	34600 [10.1]	17900 [5.2]	10800 [3.2]	15.50	12.20	1050 [495.5]	9123106
		RCF3621MEA	36000 [10.6]	19200 [5.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	9123119
		RCF6021SEA	36000 [10.6]	19500 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123132
RA1736AJ2	R96VA0602317MSA	RCF3617SEAM	34600 [10.1]	23800 [7.0]	10800 [3.2]	15.50	12.20	1050 [495.5]	8550871
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8232074
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232083
RA1736AJ2	R96VA0702317M	RCF3617SEA	34200 [10.0]	17500 [5.1]	11100 [3.3]	16.00	12.50	950 [448.4]	9123107
		RCF3621MEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	16.50	13.00	1050 [495.5]	9123120
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123133
RA1736AJ2	R96VA0702317MSA	RCF3617SEAM	34200 [10.0]	23100 [6.8]	11100 [3.3]	16.00	12.50	950 [448.4]	8550872
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8232075
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232084
RA1736AJ2	R96VA0852521M	RCF3617SEA	34800 [10.2]	18100 [5.3]	10600 [3.1]	16.00	12.50	1075 [507.3]	9123108
		RCF3621MEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	16.50	13.00	1075 [507.3]	9123121
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1075 [507.3]	9123134
RA1736AJ2	R96VA0852521MSB	RCF3617SEAM	34800 [10.2]	24200 [7.1]	10600 [3.1]	16.00	12.50	1075 [507.3]	8550873
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1075 [507.3]	8232076
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8232085
RA1736AJ2	R96VA1002521M	RCF3617SEA	34800 [10.2]	18300 [5.4]	10800 [3.2]	16.00	12.50	1050 [495.5]	9123109
		RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123122
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123135
RA1736AJ2	R96VA1002521MSA	RCF3617SEAM	34800 [10.2]	24000 [7.0]	10800 [3.2]	16.00	12.50	1050 [495.5]	8550874
		RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232077
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8232086

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R96V: 96% AFUE 2-stage Variable Speed Multipoise Gas Furnace Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1736AJ2	R96VA1152524M	RCF3621MEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123123
		RCF6021SEA	36000 [10.6]	19700 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123136
		RCF6024MEA	36000 [10.6]	20000 [5.9]	10000 [2.9]	17.00	13.00	1050 [495.5]	9123141
RA1736AJ2	R96VA0602317MXA	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8330824
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330835
RA1736AJ2	R96VA0702317MXA	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1050 [495.5]	8330825
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330836
RA1736AJ2	R96VA0852521MXB	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	16.50	13.00	1075 [507.3]	8330826
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1075 [507.3]	8330837
RA1736AJ2	R96VA1002521MXA	RCF3621MEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330827
		RCF6021SEAM	36000 [10.6]	26000 [7.6]	10000 [2.9]	17.00	13.00	1050 [495.5]	8330838
RA1748AJ2	R96VA1152524M	RCF6021SEA	47000 [13.8]	25800 [7.6]	13100 [3.8]	17.00	13.00	1400 [660.7]	9123149
		RCF6024MEA	48000 [14.1]	25500 [7.5]	13300 [3.9]	17.00	13.00	1400 [660.7]	8797259
RA1748AJ2	R96VA0852521MXB	RCF6021SEAM	47500 [13.9]	35400 [10.4]	12100 [3.5]	17.00	12.50	1550 [731.5]	8330842
RA1748AJ2	R96VA1002521MXA	RCF6021SEAM	47500 [13.9]	35400 [10.4]	12100 [3.5]	17.00	12.50	1550 [731.5]	8330843
RA1760AJ2	R96VA0852521M	RCF6021SEA	53500 [15.7]	27800 [8.1]	17100 [5.0]	15.50	11.70	1550 [731.5]	9123157
RA1760AJ2	R96VA0852521MSB	RCF6024MEAM	55000 [16.1]	38200 [11.2]	16800 [4.9]	15.50	12.00	1550 [731.5]	8232101
RA1760AJ2	R96VA1002521M	RCF6021SEA	53000 [15.5]	27400 [8.0]	18200 [5.3]	15.50	12.00	1400 [660.7]	9123158
		RCF6021SEAM	53000 [15.5]	34800 [10.2]	18200 [5.3]	15.50	12.00	1400 [660.7]	8232095
RA1760AJ2	R96VA1002521MSA	RCF6024MEAM	55000 [16.1]	38200 [11.2]	16800 [4.9]	15.50	12.00	1550 [731.5]	8232102
		RCF6021SEA	54000 [15.8]	29000 [8.5]	17100 [5.0]	16.00	12.00	1575 [743.3]	9102829
RA1760AJ2	R96VA1152524M	RCF6024MEA	54500 [16.0]	29000 [8.5]	17800 [5.2]	16.00	12.50	1400 [660.7]	9123163
		RCF6024MEAM	54500 [16.0]	36700 [10.8]	17800 [5.2]	16.00	12.50	1400 [660.7]	8232103
RA1760AJ2	R96VA0852521MXB	RCF6024MEAM	55000 [16.1]	38200 [11.2]	16800 [4.9]	15.50	12.00	1550 [731.5]	8330853
RA1760AJ2	R96VA1002521MXA	RCF6021SEAM	53000 [15.5]	34800 [10.2]	18200 [5.3]	15.50	12.00	1400 [660.7]	8330847
		RCF6024MEAM	55000 [16.1]	38200 [11.2]	16800 [4.9]	15.50	12.00	1550 [731.5]	8330854
RA1760AJ2	R96VA1152524MXA	RCF6024MEAM	54500 [16.0]	36700 [10.8]	17800 [5.2]	16.00	12.50	1400 [660.7]	8330855

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

R97VA Ratings									
Outdoor Unit	Furnace	Indoor Coil	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	R97VA060M317U	RCF2417SEA	24000 [7.0]	13700 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8942378
		RCF2421MEA	24000 [7.0]	14100 [4.1]	6900 [2.0]	17.00	13.00	775 [365.8]	8942380
RA1724AJ2	R97VA070M317U	RCF2417SEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8942379
		RCF2421MEA	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	700 [330.4]	8942381
RA1736AJ2	R97VA060M317U	RCF3617SEA	34600 [10.1]	17900 [5.2]	10800 [3.2]	15.50	12.20	1050 [495.5]	8942382
		RCF6021SEA	36000 [10.6]	19500 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942388
RA1736AJ2	R97VA070M317U	RCF3617SEA	34200 [10.0]	17500 [5.1]	11100 [3.3]	16.00	12.50	950 [448.4]	8965185
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	8965186
RA1736AJ2	R97VA085M521U	RCF3617SEA	34800 [10.2]	18100 [5.3]	10600 [3.1]	16.00	12.50	1075 [507.3]	8942383
		RCF3621MEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	16.50	13.00	1075 [507.3]	8942385
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1075 [507.3]	8942389
RA1736AJ2	R97VA100M521U	RCF3617SEA	34800 [10.2]	18300 [5.4]	10800 [3.2]	16.00	12.50	1050 [495.5]	8942384
		RCF3621MEA	36000 [10.6]	19600 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942386
		RCF6021SEA	36000 [10.6]	19900 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942390
RA1736AJ2	R97VA115M524U	RCF3621MEA	36000 [10.6]	19400 [5.7]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942387
		RCF6021SEA	36000 [10.6]	19700 [5.8]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942391
		RCF6024MEA	36000 [10.6]	20000 [5.9]	10000 [2.9]	17.00	13.00	1050 [495.5]	8942392
RA1748AJ2	R97VA085M521U	RCF6021SEA	47500 [13.9]	26400 [7.7]	12100 [3.5]	17.00	12.50	1550 [731.5]	8942393
RA1748AJ2	R97VA100M521U	RCF6021SEA	47500 [13.9]	26500 [7.8]	12100 [3.5]	17.00	12.50	1550 [731.5]	8942394
RA1748AJ2	R97VA115M524U	RCF6021SEA	47000 [13.8]	25800 [7.6]	13100 [3.8]	17.00	13.00	1400 [660.7]	8942395
		RCF6024MEA	48000 [14.1]	25500 [7.5]	13300 [3.9]	17.00	13.00	1400 [660.7]	8942396
RA1760AJ2	R97VA100M521U	RCF6021SEA	53000 [15.5]	27400 [8.0]	18200 [5.3]	15.50	12.00	1400 [660.7]	8942397
RA1760AJ2	R97VA115M524U	RCF6021SEA	54000 [15.8]	29000 [8.5]	17100 [5.0]	16.00	12.00	1575 [743.3]	8942398
		RCF6024MEA	54500 [16.0]	29000 [8.5]	17800 [5.2]	16.00	12.50	1400 [660.7]	8942399

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions – Cooling (con't.)

Air Handler Ratings								
Outdoor Unit	Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	SEER	EER	Indoor CFM [L/s]	AHRI#
RA1724AJ2	RH2T2417SEAC	24000 [7.0]	17100 [5.0]	6900 [2.0]	17.00	13.00	800 [377.6]	8550851
	RH2T2417SEAC	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9006627
	RH2T2421MEAC	24000 [7.0]	13800 [4.0]	6900 [2.0]	17.00	13.00	725 [342.2]	9006628
RA1736AJ2	RH2T3617SEAC	35600 [10.4]	25500 [7.5]	10100 [3.0]	16.50	12.50	1200 [566.3]	8550887
	RH2T3617SEAC	34800 [10.2]	18400 [5.4]	10600 [3.1]	16.00	12.50	1075 [507.3]	9006629
	RH2T6021SEAC	36000 [10.6]	20000 [5.9]	10000 [2.9]	17.00	13.00	1075 [507.3]	9006630
	RH2T6024MEAC	36000 [10.6]	20300 [5.9]	10000 [2.9]	17.00	13.00	1075 [507.3]	9006631
RA1748AJ2	RH2T6024MEAC	48000 [14.1]	26800 [7.9]	13300 [3.9]	17.00	13.00	1550 [731.5]	9006632
	RH2T6021SEAC	47000 [13.8]	25600 [7.5]	13100 [3.8]	17.00	12.50	1400 [660.7]	9006633
	RH2T6024MEAC	48000 [14.1]	25500 [7.5]	13300 [3.9]	17.00	13.00	1400 [660.7]	9006634
RA1760AJ2	RH2T6021SEAC	54000 [15.8]	28500 [8.4]	17100 [5.0]	15.50	11.70	1550 [731.5]	9006635
	RH2T6024MEAC	55500 [16.3]	30200 [8.9]	16800 [4.9]	16.00	12.00	1550 [731.5]	9006636

[] Designates Metric Conversions

GUIDE SPECIFICATIONS

General

System Description

Outdoor-mounted, air-cooled, split-system air conditioner composite base pan unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, propeller-type condenser fan, suction and legend line service valve, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 210.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ANSI/ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have c-UL-us approval.
- Unit cabinet will be capable of withstanding ASTM B117 1000-hr salt spray test.
- Air-cooled condenser coils will be leak tested at 150 psig and pressure tested at 550 psig.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer) – U.S. and Canada only.

Products

Equipment

Factory assembled, single piece, air-cooled air conditioner unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge R-410A, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.
- All units constructed with louver coil protection and corner post. Louver can be removed by removing one fastener per louver panel.

AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER

RA17

1-1/2 TO 5 NOMINAL TONS

Fans

- Condenser fan will be direct-drive propeller type, discharging air upward.
- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated bearings. Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes.

Refrigeration Components

- Refrigeration circuit components will include liquid-line shutoff valve with sweat connections, vapor-line shutoff valve with sweat connections, system charge of R-410A refrigerant, and compressor oil.
- Unit will be equipped with filter drier for R-410A refrigerant for field installation.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F/°C. The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F/°C wet bulb and _____ °F/°C dry bulb, and air entering the unit at _____ °F/°C.
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Nominal unit electrical characteristics will be _____ v, three phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Unit Replacement
(Registration Required) Ten (10) Years
Parts Ten (10) Years



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED HOME COMFORT

PRINTED IN U.S.A. 8/16 QG FORM NO. A11-223 REV. 4